



Isobutylene (C₄H₈)

A colorless, flammable gas.


Purity: **Grade 2.5**

Specifications: **99.5%**

Other Hydrocarbons <4500 ppmv

H₂O <3 ppmv

Sulfur <1 ppmv

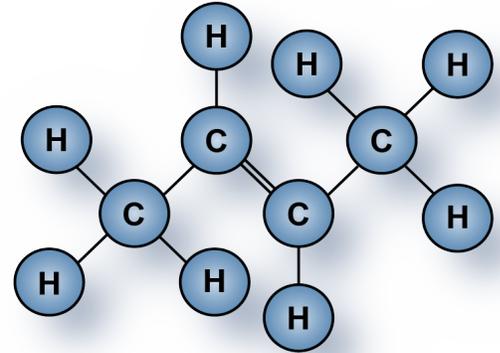

***Moisture level guaranteed only when Electronic Fluorocarbons prepares the cylinders.*

All concentrations are on a mol/mol basis unless otherwise stated.

Product sold on the basis of total impurities. Individual impurities may vary slightly.

**This gas not available for purchase online.*

Cylinder Size

Fill Weight (lbs)

LP30

120

LP05

24

Shipping Information:

DOT Name: Isobutylene

Hazard Class: 2.1

DOT No.: UN1055

DOT Label: Flammable Gas

CAs No.: 115-11-7

Technical Data:

Mol. Wt: 53.1063

Specific Volume: 6.90 cu. ft/lb

Flammability Limits in Air: 1.8-9.6%

Pressure @ 70°F: 24 psig

Valve Outlet: CGA 510